




Shandong Chik Bearing Co., Ltd.

35 mm x 80 mm x 21 mm NTN 6307LLB deep groove ball bearings

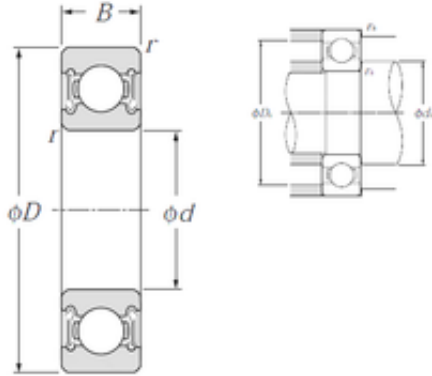

Bearing No. 6307LLB

6307LLB Bearing 2D drawings and 3D CAD models

Size	35x80x21 mm
Bore Diameter	35 mm
Outer Diameter	80 mm
Width	21 mm
d	35 mm
D	80 mm
B	21 mm
C	21 mm
r min.	1,5 mm
da min.	43 mm
da max	47 mm
Da max.	72 mm
ra max.	1,5 mm
Weight	0,457 Kg
Basic dynamic load rating (C)	33,5 kN
Basic static load rating (C0)	19,1 kN
(Grease) Lubrication Speed	8 800 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.463
EAN	4547359005493
Product Group	B00308
Enclosure	2 Seals



Shandong Chik Bearing Co., Ltd.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	35MM Bore; 80MM Outside Diameter; 21MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6307LLB
Weight / LBS	1.023
Bore	1.378 Inch 35 Millimeter
Outer Race Width	0.827 Inch 21 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	35 mm
static load capacity:	19100 N



Shandong Chik Bearing Co., Ltd.

outside diameter:	80 mm
precision rating:	ISO Class 0
overall width:	21 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	21 mm
snap ring included:	Without Snap Ring
outer ring width:	21 mm
internal clearance:	CN
maximum rpm (grease):	8800 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1.5 mm
dynamic load capacity:	33500 N
manufacturer product page:	Click here